



# BGF

## S.E.C. System

A++

Inox - Stainless Steel

50  
75  
99  
124  
cm

eco

Elect.

Last TIME

LED 4000K

Filters Inox

Filters Auto.

SIA Safety

GAS 65

IND 55-65

Profundidad 460 mm  
Depth 460 mm

### Motor Interior / Interior Motor S.E.C. System®

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
50	V.750	Ø125	B	8504
	V.850	Ø150	A	6810
	V.1050 eco	Ø150	A+	9671
75	V.750	Ø125	B	8508
	V.850	Ø150	A	6811
	V.1050 eco	Ø150	A+	9624
99	V.1250 eco	Ø150	A++	8509
	V.750	Ø125	B	8512
	V.850	Ø150	A	6812
124	V.1050 eco	Ø150	A+	9628
	V.1250 eco	Ø150	A+	8513
	V.850	Ø150	A	6813
	V.1250 eco	Ø150	A++	8516

### Motor Intermedio exterior / Duct-in-line motor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
75	V.1550 eco	Ø150	A+	9625
99	V.1550 eco	Ø150	A+	9629
	V.2450 eco	Ø200	A+	9631
124	V.1550 eco	Ø150	A+	9635
	V.2450 eco	Ø200	A+	9637

### Motor de tejado / Remote Motor: Roof Outdoor

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
99	V.2350 eco	Ø200	A+	9632
124	V.2350 eco	Ø200	A+	9638

### Opcionales / Options

#### AirLink


Modelo compatible. Es imprescindible solicitar esta opción en el pedido de la campana. No se equipa de serie. Compatible Model. This option must be requested together with the purchase order. Is not included as standard.

Kits de recirculación FCA. Ver página 207. Activated carbon filters kit. FCA. See page 207

Cambio LED original a LED cálido de 3000K. Suministrado con la campana. LED change to warm light LED 3000K. Available only at the factory

Mando a distancia Touch. Suministrado con la campana. Remote Touch Control supplied together with the hood.

### Esquema medidas / Technical Drawings

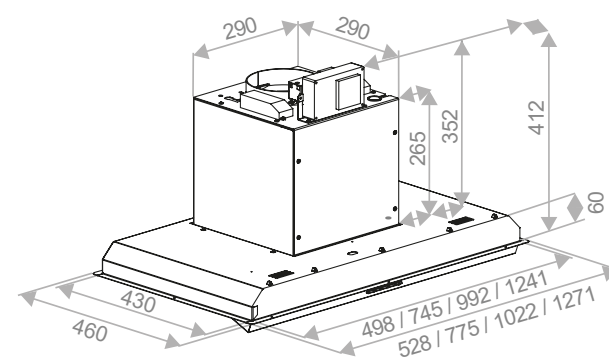

Medidas Encastre  
Built in Sizes

50	502 x 437
75	750 x 437
99	997 x 437
124	1245 x 437



Gris - Gray

# BGF

A++

60  
80  
cm

eco

LED 4000K

Elect.

Last TIME

Filters Inox

Filters Auto.

SIA Safety

GAS 65

IND 55-65

Profundidad 440 mm  
Depth 440 mm

### Motor Interior / Interior Motor E.C. System®

Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
60	V.850	Ø150	A	8695
	V.1050 eco	Ø150	A++	9639
80	V.850	Ø150	A	8699
	V.1050 eco	Ø150	A++	9641

### Opcionales / Options


#### AirLink

Modelo compatible. Es imprescindible solicitar esta opción en el pedido de la campana. No se equipa de serie. Compatible Model. This option must be requested together with the purchase order. Is not included as standard.

Cambio LED original a LED cálido de 3000K. Suministrado con la campana. LED change to warm light LED 3000K. Available only at the factory

Mando a distancia Touch. Suministrado con la campana. Remote Touch Control supplied together with the hood.

### Esquema medidas / Technical Drawings

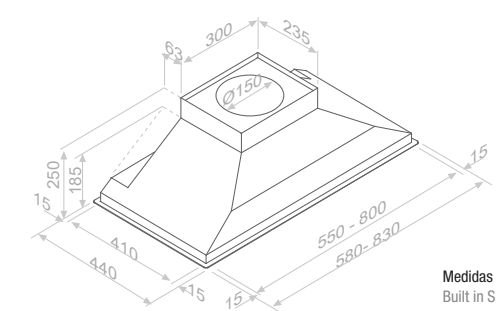

Medidas encastre  
Built in Sizes

60	555 x 415
80	805 x 415

### Notas / Notes

Opción de recirculación mediante difusor a techo. Recirculation option by Ceiling Diffuser available.



Inox - Stainless Steel

# PGF

A

60  
70  
cm

LED 4000K

Slider

Filters ALU

GAS 65

IND 55-65

### Motor Interior / Interior Motor E.C. System®


Front. (cm)	Motor	Ø tubo	Clas. Ener.	Ref.
60	V.730	Ø120	A	9954
70	V.730	Ø120	A	9955

### Opcionales / Options

Kits de recirculación FCA. Ver página 207. Activated carbon filters kit. FCA. See page 207

Cambio a LED de luz cálida de 3000K. Suministrado con la campana. LED change to warm light LED 3000K. Available only at the factory

### Esquema medidas / Technical Drawings

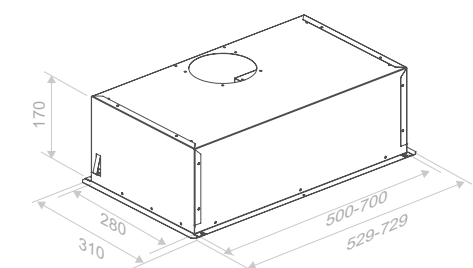

Medidas encastre  
Built in Sizes

60	505 x 285
70	705 x 285